


# SELF CALIBRATING PURGE ANALYSER



Large 4 digit display for clear readings to 2 decimal places.

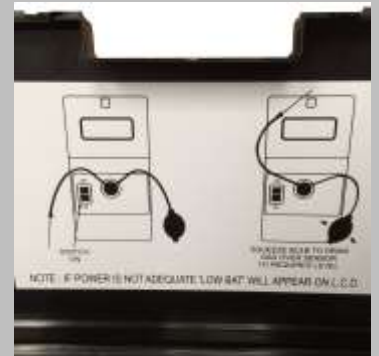

Instructions are adhered inside the lid preventing them being lost when on site.

This Welding Purge Analyser Kit is self calibrating and is ready to use straight out of the box. The analyser measures Oxygen levels in the purged weld area, letting the operator know exactly when it is safe to begin welding. This will result in a reduction in waiting time and the amount of purge gas used, as well as high quality oxide free welds.

- The kit consists of:-
- Analysers
  - 1M Hose with Flow Adaptor
  - Stainless Steel Probe
  - Aspirator Bulb
  - Carry Case
  - Instructions
  - Calibration Certificate

- Measuring Range: 20.9% to 0.01% (100ppm)
- Sensor response: T90 < 15 seconds
- Operating temperature: -10 to +40 Degrees C
- Power Source: P3 9 Volt battery (Approx. 4000 hours usage)
- Warranty: Electronics 2 years

- Sizes:
  - Analysers 150mm x 80mm x 55mm
  - Case 180mm x 230mm x 55mm

Manufactured in the UK.

TM Reg. No: 2299965



Small, handheld and portable and so can be used in a fabrication workplace or out on site.



Replacement Sensors and full range of spares available from stock.

## ***BH Tungsten Grinders Ltd***

Unit 7 Rose Way

Blaby

Leicester

LE8 4BY

Tel: 0116 2864342

sales@tungstengrinders.co.uk